



170° Concealed Hinge

SPECIFICATIONS

Collection Name: Hinges

Type: Hardware

Purpose: Allows 170° Hinging Access of Doors

Common Uses: Doors

Manufacturer/Model: Blum/71T6580


Finish: Nickel

Length: See Below

Width: See Below

Projection: See Below

Other: All Blum hinges meet or exceed ANSI/BHMA A156.9-2001 grade 2 requirements. Available in Blumotion by Special Request Only

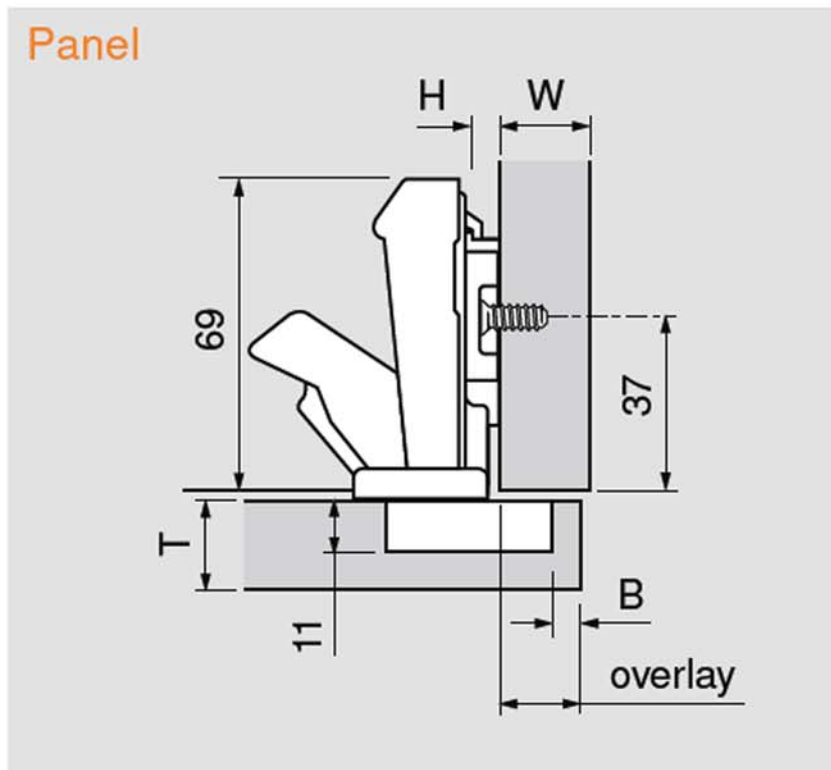

H	Overlay						P	S
0	14	15	16	17	18	19	1.5	65
3	11	12	13	14	15	16	4.5	68
4.5	9.5	10.5	11.5	12.5	13.5	14.5	6	69.5
6	8	9	10	11	12	13	7.5	71
9	5	6	7	8	9	10	10.5	74
	3	4	5	6	7	8	Fixed distance = 11	
	B = boring distance							

NOTE: 4.5 plate is only for use in face frame cabinets, 9 plate is only for panel cabinets

Opening Force:
 Average: 7.1N (1.59lbf)
 Min: 5.4N (1.21lbf)
 Max: 9.4N (2.11lbf)

Stay Close Force:
 Average: 3.1N (.696lbf)
 Min: 2.5N (.562lbf)
 Max: 4.3N (.966lbf)

